

FORM PTO-1390 (REV. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER SWH/AVK/P71830US	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5)	
				09/980383	
INTERNATIONAL APPLICATION NO. PCT/GB00/01968		INTERNATIONAL FILING DATE 31 May 2000 (31.05.2000)		PRIORITY DATE CLAIMED 1 June 1999 (01.06.1999)	
TITLE OF INVENTION Material for Use in a Fluid Transfer System					
APPLICANT(S) FOR DO/EO/US GASKARTH, John Alexander					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p style="margin-left: 20px;">a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p style="margin-left: 20px;">b. <input type="checkbox"/> has been communicated by the International Bureau.</p> <p style="margin-left: 20px;">c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p style="margin-left: 20px;">a. <input type="checkbox"/> is attached hereto.</p> <p style="margin-left: 20px;">b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p style="margin-left: 20px;">a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p style="margin-left: 20px;">b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p style="margin-left: 20px;">c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p style="margin-left: 20px;">d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 20 below concern document(s) or information included:</p> <p>11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input type="checkbox"/> Other items or information:</p>					

097980383 US APPLICATION NO. (If known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO. PCT/GB00/01968		ATTORNEY'S DOCKET NUMBER SWH/AVK/P71830US	
--	--	---	--	--	--

21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
				\$	890.00
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total claims	22 - 20 =	2	x \$18.00	\$	36.00
Independent claims	4 - 3 =	1	x \$84.00	\$	84.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				\$	280.00
TOTAL OF ABOVE CALCULATIONS =				\$	1,010.00
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
SUBTOTAL =				\$	505.00
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	505.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$	
TOTAL FEES ENCLOSED =				\$	505.00
				Amount to be refunded:	\$
				charged:	\$

a. ☒ A check in the amount of \$ 505.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
 A duplicate copy of this sheet is enclosed.


c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
 overpayment to Deposit Account No. 11-0307. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card
 information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR
 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

KENNETH A. KEELING
 JAMES E. HUDSON III
 KEELING HUDSON L.L.C.
 901 NORTH POST OAK ROAD
 HOUSTON, TEXAS 77024


 SIGNATURE
 Kenneth A. KEELING
 NAME
 31,842
 REGISTRATION NUMBER

09/980383

JC10 Rec'd PCT/PTO 30 NOV 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: John Alexander Gaskarth)
) Group Art Unit:
)
Serial No.:)
)
Filed:) Examiner:
)

For: MATERIALFOR USE IN FLUID TRANSFER SYSTEM

November 30, 2001

Commissioner for Patents and Trademarks
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Prior to calculating the filing fee for the captioned application, please enter the following amendment:

I. Amendment

Please amend the application as follows:

In The Claims

Please cancel claims 1 through 32 and insert in their place the following claims.


What is claimed is:

CERTIFICATION OF MAILING UNDER 37 C.F.R. 1.10

I hereby certify that the Response to Office Action and Amendment are being deposited with the United States Postal Service on the date listed below in an envelope as "Express Mail Post Office to Addressee": Mailing Label Number ET 583 400 475 US addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Date

11/30/01


Kenneth A. Keeling
Registration No. 31,842

1. A fluid transfer material for use in a system for transferring fluid, the fluid transfer material comprising:
 - at least one cured thermoset material; and
 - at least one thermoplastic material melded thereto, characterised in that there is sufficient thermoset material to create an open structure of the fluid transfer material.
2. A fluid transfer material according to claim 1, further comprising at least one fibrous material, of which, together with the thermoset material, there is sufficient to create said open structure of the fluid transfer material.
3. A fluid transfer material according to claim 1, wherein at least one said thermoset material is chopped, shredded or fragmented.
4. A fluid transfer material according to claim 1, wherein at least one said thermoset material comprises rubber.
5. A fluid transfer material according to claim 4, wherein said rubber is from recycled tyres of motor vehicles.
6. A fluid transfer material according to claim 2, wherein at least one said fibrous material is selected from the group comprising straw, wood and an inorganic material.
7. A fluid transfer material according to claim 1, wherein at least one said thermoplastic material is recycled.
8. A fluid transfer material according to claim 7, wherein said recycled thermoplastic material is chopped or shredded.
9. A fluid transfer material according to claim 1, wherein said fluid transfer material is at least partially surrounded by netting, preferably a fine mesh net.

10. A fluid transfer material according claim 1 further comprising at least one selected from the group of mica and vermiculite.
11. A fluid transfer system comprising:
 - a conduit for carrying fluid; and
 - a fluid transfer material according to any of the preceding claims, the fluid transfer material cooperating with said conduit for transferring fluid thereto and/or therefrom.
12. A fluid transfer system according to claim 11, wherein said conduit is a gutter arranged in use below an elongate length of said fluid transfer material.
13. A fluid transfer system according to claim 11, wherein said conduit is an elongate pipe having means for enabling passage of fluid between the interior and exterior thereof and said pipe being at least partially surrounded by an elongate length of said fluid transfer material.
14. A fluid transfer system according to claim 13, wherein said means for enabling the passage of fluid between the interior and the exterior of the pipe comprises at least one aperture in the pipe.
15. A fluid transfer system according to claim 13, wherein said means for enabling the passage of fluid between the interior and the exterior of the pipe comprises at least one slot arranged in the upper part of said pipe in use.
16. A fluid transfer system according to claim 13, wherein said means for enabling the passage of fluid between the interior and the exterior of the pipe comprises said pipe being porous.
17. A fluid transfer system according to claim 11, wherein said system is used for one selected from the group comprising drainage and irrigation.
18. A method of making a fluid transfer material comprising the steps of:-
 - mixing together at least one thermoset material, optionally at least one fibrous material, and at least one thermoplastic material to form a mixture;
 - placing said mixture in a mould; and

heating said mixture so as to cause the melding of said at least one thermoplastic material to the other materials, there being sufficient thermoset material, and fibrous material when present, to create an open structure of the fluid transfer material.

19. A method according to claim 18, further comprising the step of preheating said mixture before it is placed in said mould.

20. A method according to claim 18, wherein said mixture is heated by the introduction of a heated gas into the mixture.

21. A fluid transfer material for use in a system for transferring fluid, the fluid transfer material comprising at least one fibrous material mixed with and melded to at least one thermoplastic material.

22. A fluid transfer material according to claim 1, wherein said material is formed by an extrusion process.

II. Remarks Concerning the Drawing Amendments

Prior claims 1 through 32 have been cancelled. They are replaced with amended claims 1 through 22.

As amended, the application presents a total 22 claims, 4 of which are independent claims.

Respectfully submitted,



Kenneth A. Keeling
Registration No. 31,842

Keeling Hudson LLC
901 North Post Oak Road
Houston, Texas 77024
(713) 680-1447
(713) 680-8567 Fax

AMENDED CLAIMS (Marked Up Version)

What is claimed is:

1. A fluid transfer material for use in a system for transferring fluid, the fluid transfer material comprising:
at least one cured thermoset material; and
at least one thermoplastic material melded thereto, characterised in that there is sufficient thermoset material to create an open structure of the fluid transfer material.
2. A fluid transfer material according to claim 1, further comprising at least one fibrous material, of which, together with the thermoset material, there is sufficient to create said open structure of the fluid transfer material.
3. A fluid transfer material according to claim 1, wherein at least one said thermoset material is chopped, shredded or fragmented.
4. A fluid transfer material according to claim 1, wherein at least one said thermoset material comprises rubber.
5. A fluid transfer material according to claim 4, wherein said rubber is from recycled tyres of motor vehicles.
6. A fluid transfer material according to claim 2, wherein at least one said fibrous material is selected from the group comprising straw, wood and an inorganic material.
7. A fluid transfer material according to claim 1, wherein at least one said thermoplastic material is recycled.
8. A fluid transfer material according to claim 7, wherein said recycled thermoplastic material is chopped or shredded.
9. A fluid transfer material according to claim 1, wherein said fluid transfer material is at least partially surrounded by netting, preferably a fine mesh net.

10. A fluid transfer material according claim 1 further comprising at least one selected from the group of mica and vermiculite.
11. A fluid transfer system comprising:
a conduit for carrying fluid; and
a fluid transfer material according to any of the preceding claims, the fluid transfer material cooperating with said conduit for transferring fluid thereto and/or therefrom.
12. A fluid transfer system according to claim 11, wherein said conduit is a gutter arranged in use below an elongate length of said fluid transfer material.
13. A fluid transfer system according to claim 11, wherein said conduit is an elongate pipe having means for enabling passage of fluid between the interior and exterior thereof and said pipe being at least partially surrounded by an elongate length of said fluid transfer material.
14. A fluid transfer system according to claim 13, wherein said means for enabling the passage of fluid between the interior and the exterior of the pipe comprises at least one aperture in the pipe.
15. A fluid transfer system according to claim 13, wherein said means for enabling the passage of fluid between the interior and the exterior of the pipe comprises at least one slot arranged in the upper part of said pipe in use.
16. A fluid transfer system according to claim 13, wherein said means for enabling the passage of fluid between the interior and the exterior of the pipe comprises said pipe being porous.
17. A fluid transfer system according to claim 11, wherein said system is used for one selected from the group comprising drainage and irrigation.
18. A method of making a fluid transfer material comprising the steps of:-
mixing together at least one thermoset material, optionally at least one fibrous material, and at least one thermoplastic material to form a mixture;

placing said mixture in a mould; and
heating said mixture so as to cause the melding of said at least one thermoplastic material to the
other materials, there being sufficient thermoset material, and fibrous material when present, to create
an open structure of the fluid transfer material.

19. A method according to claim 18, further comprising the step of preheating said mixture before it is placed in said mould.
20. A method according to claim 18, wherein said mixture is heated by the introduction of a heated gas into the mixture.
21. A fluid transfer material for use in a system for transferring fluid, the fluid transfer material comprising at least one fibrous material mixed with and melded to at least one thermoplastic material.
22. A fluid transfer material according to claim 1, wherein said material is formed by an extrusion process.

10 Rec'd PCT/PTO 3.0 NOV 2001

MATERIAL FOR USE IN A FLUID TRANSFER SYSTEM

The present invention relates to a material for use in a system for transferring fluid, and to a fluid transfer system incorporating such a material. The invention relates particularly, but not exclusively, to a material for use in a drainage and/or irrigation system.

Underground drainage/irrigation systems are known in which an underground pipe having slits, respectively carries water away from/to an area of ground to be drained or irrigated. Such systems suffer from the drawback that mud and silt can enter into the pipe and cause blockages, or the slits in the pipe can become blocked by debris.

When laying such a pipe considerable care is required in maintaining a constant gradient to allow the water to pass in or out. Therefore obstacles in the ground, such as rocks or tree roots, have to be avoided and the back filling of trenches dug to lay the pipes in must be undertaken with great care.

Care when back filling is also required as such pipes can become distorted, compressed or ruptured. This can lead to direct blockage, or to inconsistent drainage or irrigation and an increased likelihood of blockage occurring due to siltation as described above.

Such pipe systems cannot be located close to trees or hedges as the roots of such plants can infiltrate the pipes. Once within a pipe, the root system grows rapidly in the water rich environment and can quickly lead to blockages.

-2-

A further problem associated with pipe systems is that as the diameter of a pipe is increased, the quantity of material required to construct a pipe of sufficient strength to protect against compression dramatically increases. This in turn significantly increases the cost of the pipe.

All such pipes can also succumb to compression forces from the surface, such as experienced from increasing heavy farm machinery, and are prone to collapse. This problem is accentuated around areas of most frequent use, such as gateways.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

According to an aspect of the present invention, there is provided a fluid transfer material for use in a system for transferring fluid, the material comprising:

at least one cured thermoset material; and/or

at least one fibrous material; and

at least one thermoplastic material melded thereto.

By providing a thermoplastic material melded with or bonded to at least one fibrous material and/or at least one thermoset material, this provides the advantage of providing a fluid transfer material through which fluid can pass, but which prevents passage of larger particles such as stones or gravel, which could otherwise cause blockages in pipes.

At the same time, the fluid transfer material can be constructed with a relatively rigid open structure, which enables the fluid transfer material to be sufficiently strong and durable while still allowing fluid to pass therethrough. The thermoset material is used to provide rigidity, and

-3-

resilience to compressive forces. The fibrous material is provided to assist the thermoset material in creating an open structure. In time the fibrous material may decay and further assist in creating an open structure.

At least one said thermoset material may be chopped, shredded or fragmented.

This provides the advantage of enabling the fluid transfer material to be formed into a large sectional, relatively solid material, which has a porous structure. By forming the material into a structure of large surface area in this way, the further advantage is provided of enabling the fluid flow through the material to be maximised, while at the same time enabling some solid contaminants particularly large contaminants to be filtered. Furthermore, to create an increase in the overall size of the fluid transfer structure, without a decrease in strength of the structure, the above described embodiment of the present invention does not require a significant increase in material used in its construction and as a result its cost, when compared to that required in pipe systems.

At least one thermoset material may comprise rubber.

At least one said thermoset material may be recycled from motor vehicles.

At least one said fibrous material may comprise straw.

At least one said fibrous material may comprise wood.

At least one said fibrous material may be inorganic.

At least one said thermoplastic material may be recycled.

-4-

The use of the above waste or recycled materials provides the advantage of utilising low cost raw materials, while at the same time providing a use for many materials which present difficulties in recycling. The thermoset material used may be reclaimed materials from the vehicle dismantling industry or from car tyres which at present are costly to dispose of. Fibrous materials such as straw also present disposal problems, in particular linseed and rape straw which rot much more slowly than other straws. The thermoplastics may also be recycled, and mixed source thermoplastics may be used. The use of mixed source thermoplastics has the further advantage that unlike many conventional thermoplastic recycling techniques, which require a relatively high level of purity of recycled material, almost any thermoplastic can be added to the mixture to facilitate the bonding or melding together of the other materials.

These benefits of low cost raw materials provide the further advantage that the volume of the material to be used is not restricted by cost, thus enabling extensive drainage to be carried out on heavy, wet land.

At least one said thermoplastic material may be chopped or shredded.

In a preferred embodiment, the material is moulded.

In another preferred embodiment, the materials are mixed together, preheated and placed into mould where they are melded together.

In a further preferred embodiment the materials are heated by hot gas.

Alternatively, the material may be formed by an extrusion process at elevated temperature.

-5-

In a preferred embodiment the material is at least partially surrounded by netting.

Preferably, the netting is in the form of a fine mesh.

By providing a net around the material, the advantage is provided that an additional filtering of particulate matter occurs prior to fluid passing into the material. This will therefore reduce the quantity of suspended solids within the effluent discharged from the material, making the effluent more suitable for discharging in watercourses or for providing drinking water for livestock. Furthermore, the netting will reduce the risk of blockage within the material and therefore extend its life.

In preferred embodiments said material further comprises mica or vermiculite.

By adding mica or vermiculite to the fluid transfer material the advantage is provided that the material retains some water within it the structure, longer than when such materials are not present, and is able to give this material up later. This provides the advantage when the material is used for irrigation or as a rooting media for use in hydroponics that water has a longer retention time within the material.

According to another aspect of the present invention, there is provided a system for transferring fluid comprising:

a conduit for carrying fluid; and

a material as defined above, the material cooperating with said conduit for transferring fluid thereto and/or therefrom.

In a preferred embodiment, said conduit is a gutter arranged in use below an elongate length of said fluid transfer material.

-6-

The conduit may be an elongate pipe having means for enabling passage of fluid between the interior and exterior thereof, said pipe being at least partially surrounded by an elongate length of said fluid transfer material.

The means for enabling passage of fluid between the interior and exterior of the pipe may comprise one or more apertures in the pipe.

The pipe may have at least one slot arranged in an upper part thereof in use.

The pipe may be porous.

Such a system may be used as a more efficient alternative or supplementary to back filling of trenches dug to lay drainage/irrigation pipes in. Such a system has the important advantage of protecting the pipe from compressive forces. The system can also filter and minimise the passage of solid contaminants in drainage water before they can be introduced to the pipe.

The system may be for drainage.

Alternatively, or in addition, the system may be for irrigation.

According to a further aspect of the present invention, there is provided a method of making a fluid transfer material comprising the steps of:-

mixing together at least one thermoset material and/or at least one fibrous material and at least one thermoplastic material to form a mixture;

placing said mixture in a mould; and

-7-

heating said mixture so as to cause the melding of said at least one thermoplastic material to the other materials.

A preferred method further comprises the step of preheating said mixture before it is placed in said mould.

In a further preferred method the heating of said mixture is heated by the introduction of a heated gas into the mixture.

According to another aspect of the present invention there is provided a method of making a fluid transfer material comprising the steps of:-

mixing together pieces of thermoplastic materials having differing melt points and/or of differing sizes;

heating said thermoplastics so as to cause the at least partial melting of at least some of said thermoplastics, and thereby meld at least some said thermoplastics to at least some other thermoplastics; and

cooling said thermoplastics so as to form a substantially rigid material having a continuous porous structure throughout its volume.

By providing a method as outlined above the advantage is provided that a fluid transfer material having the advantages set out above can be provided using only thermoplastic materials.

Preferred embodiments of the invention will now be described, by way of example only, and not in any limitative sense, with reference to the accompanying drawings, in which:-

Figure 1 is a schematic perspective view of a cross-section view of a drainage and/or irrigation system of a first embodiment of the present invention;

-8-

Figure 2 is a view, corresponding to Figure 1, of a system of a second embodiment of the invention;

Figure 3 is a view, corresponding to Figure 1, of a system of a third embodiment of the invention;

Figure 4 is a view, corresponding to Figure 1, of a system of a fourth embodiment of the invention;

Figure 5 is a schematic perspective view of a drainage and/or irrigation material of a fifth embodiment of the present invention;

Figure 6 is a detailed schematic view of a part of the material of Figure 5;

Figure 7 is a schematic perspective view of a drainage and/or irrigation material of a fifth embodiment of the present invention;

Figure 8 is a detailed schematic view of a part of the material of Figure 7.

Referring to Figure 1, an irrigation and/or drainage system 1 comprises a generally cylindrical pipe 2 having slots (not shown), the pipe 2 being surrounded by an elongate length of a fluid transfer material 3 formed from a moulded mixture of shredded thermoplastics, shredded thermoset materials and organic and/or inorganic fibre. As can be seen from the Figure, the width of the length of material 3 is considerably greater in the region above the pipe 2 than in the vicinity of the pipe 2. This enables the material 3 to capture fluid from (or deliver fluid to) a large volume of ground.

Figure 2 shows a second embodiment of the irrigation and/or drainage system 11, which differs from the embodiment of Figure 1 in that the material 13 is of generally circular transverse

-9-

cross section with the pipe 12 arranged at a lower part thereof.

Referring to Figure 3, a drainage and/or irrigation system 31 of a third embodiment comprises an elongate gutter 32 arranged below an elongate length of the fluid transfer material 33 described with reference to Figures 1 and 2 above and having the same shape as the material 3 of Figure 1. Similarly, the material 43 of the embodiment of Figure 4 has the same shape as the material 13 of figure 2.

Referring to Figure 5, a drainage/irrigation material 50 is placed at the boundary between the top soil 52 and subsoil 54.

Referring to Figure 6, the material 50 comprises thermoset 60 and fibrous material 62 which is melded together with thermoplastic material 64 such that interstices or air holes 66 are formed between the materials. It is through these interstices 66 that in use the fluid being drained or irrigated flows.

Referring to Figure 7, a drainage/irrigation material 70 is placed in a trench 72. Soil removed to create trench 72 will be replaced to cover the material 70.

Referring to Figure 8, the material 70 comprises thermoset 80 which is melded together with thermoplastic material 84 such that interstices or air holes 86 are again formed between the materials, and through which the movement of water occurs.

Any of the above described embodiments of the present invention may be produced by moulding. A combination of the thermoplastics and at least one of the fibrous and thermoset materials are heated to a temperature above the melt point of the dominant thermoplastic of the mixture, mixed and being placed in a mould. The mixture is heated in the mould by the introduction of hot air, providing an even distribution of

-10-

heat. The heating of the thermoplastics allows them to meld or bond with themselves and with the other materials. The material is then allowed to cool and set. The cooling process can be speeded by the introduction of liquid nitrogen. Ultrasonic, infrared or microwave heating techniques may also be used to reach the required melt point temperature.

In order for the thermoplastics to meld with the other materials, it is necessary that the pieces of thermoplastics melt at least sufficiently so as to be able to weld themselves to other thermoplastics and/or the other materials.

The above described embodiments can also be produced by extrusion. Hopper fed, straight barrel, straight screw, in-line or cross-head extruders are suitable systems for producing such materials. The speed of production and pressure used within the extruder can be varied to produce various densities (ie more open or compact structure) of products for use in different circumstances and purposes. Again liquid nitrogen can be used to assist in the cooling process, and ultrasonic heating techniques may be used to heat the mixture to the required temperature for extrusion. The use of adhesives in addition or as an alternative to thermoplastics would reduce or eliminate the necessity for heating the mixture and cooling the resultant product.

Use of an extrusion process will also tend to cause a proportion of the longer fibres, whether from the fibrous material or shreds of rubber, to align along the axis of the extrusion. When the extruded product is in the ground acting as drain or irrigation means, the direction of the fibres will tend to draw water along the drainage/irrigation system by a wicking process.

Where a cross-head extruder is used a line or rope may be introduced to the middle of the product profile. Netting may also be wrapped around the outside of the product to assist in

-11-

the handling of the product once manufactured. The netting may be wrapped around the outside of the product either completely or at least partially covering it. Alternatively a sleeve of netting maybe introduced.

To form elongate gutter 32, shown in Figure 3, a sheet of thermoplastic is placed on the underside of the formed profile before it is cooled. The retained heat in the newly formed profile is sufficient to meld the thermoplastic to the profile. If there is not enough residual heat, addition heat can applied to assist with the bonding process.

The material may also be used as a rooting media for hydroponics. When used for hydroponics or for irrigation, mica or vermiculite may be added to the mixture which hold some water, thereby increasing the retention time of water within the material.

It will be appreciated by persons skilled in the art that the above embodiments have been described by way of example only and not in any limitative sense, and that various alterations and modifications are possible without departure from the scope of the invention as defined by the appended claims. For example it will be appreciated by persons skilled in the art that fluid transfer systems with a high fibrous content (and low or zero thermoset content) are suitable for use as absorbent materials for substances such as oils, and can therefore be formed into oil absorbent booms for spillage control.

It will also be appreciated by persons skilled in the art that such fluid transfer systems can be used as a rooting media for plants grown by hydroponic means.

It will be further appreciated that such fluid transfer systems can be formed into mats or sections for laying under areas requiring intensive drainage and/or irrigation such as sports

-12-

area including golfing greens. In another application for such a fluid transfer material a high thermoset and low or zero fibrous content material can be formed into mats or sections and used as part of a drainage system in the construction of roads.

ART 34 AMDT

-13-

CLAIMS

1. A fluid transfer material for use in a system for transferring fluid, the fluid transfer material comprising:

at least one cured thermoset material; and

at least one thermoplastic material melded thereto.
2. A fluid transfer material according to claim 1, further comprising at least one fibrous material.
3. A fluid transfer material according to either claim 1 or 2, wherein at least one said thermoset material is chopped, shredded or fragmented.
4. A fluid transfer material according to any one of the preceding claims, wherein at least one said thermoset material comprises rubber.
5. A fluid transfer material according to any one of the preceding claims, wherein at least one thermoset material is recycled from motor vehicles.
6. A fluid transfer material according to any one of claims 2 to 5, wherein at least one said fibrous material comprises straw.
7. A fluid transfer material according to any one of claims 2 to 6, wherein at least one said fibrous material comprises wood.

-14-

8. A fluid transfer material according to any one of claims 2 to 7, wherein at least one said fibrous material is inorganic.
9. A fluid transfer material according to any of one of the preceding claims, wherein at least one said thermoplastic material is recycled.
10. A fluid transfer material according to any of the preceding claims, wherein at least one said thermoplastic material is chopped or shredded.
11. A fluid transfer material according to any one of the preceding claims, wherein said material is formed by a moulding process.
12. A fluid transfer material according to any one of the preceding claims, wherein the thermoset and/or fibrous and thermoplastic materials mixed together, preheated and placed in a mould and are melded together.
13. A fluid transfer material according to claim 12, wherein the materials are heated by hot air.
14. A fluid transfer material according to any of claims 1 to 10, wherein said material is formed by an extrusion process.
15. A fluid transfer material according to any one of the preceding claims, wherein said material is at least partially surrounded by netting.
16. A fluid transfer material according to claim 15, wherein said netting comprises a fine mesh net.

-15-

17. A fluid transfer material according to any of the preceding claims further comprising mica.
18. A fluid transfer material according to any of the preceding claims further comprising vermiculite.
19. A fluid transfer material for use in a fluid transfer system, the fluid transfer material substantially as hereinbefore described with reference to the accompanying drawings.
20. A fluid transfer system comprising:

a conduit for carrying fluid; and

a fluid transfer material according to any of the preceding claims, the fluid transfer material cooperating with said conduit for transferring fluid thereto and/or therefrom.
21. A fluid transfer system according to claim 20 wherein said conduit is a gutter arranged in use below an elongate length of said fluid transfer material.
22. A fluid transfer system according to claim 20 wherein said conduit is an elongate pipe having means for enabling passage of fluid between the interior and exterior thereof and said pipe being at least partially surrounded by an elongate length of said fluid transfer material.
23. A fluid transfer system according to claim 22 wherein said means for enabling the passage of fluid between the interior and the exterior of the pipe comprises one or more apertures in the pipe.

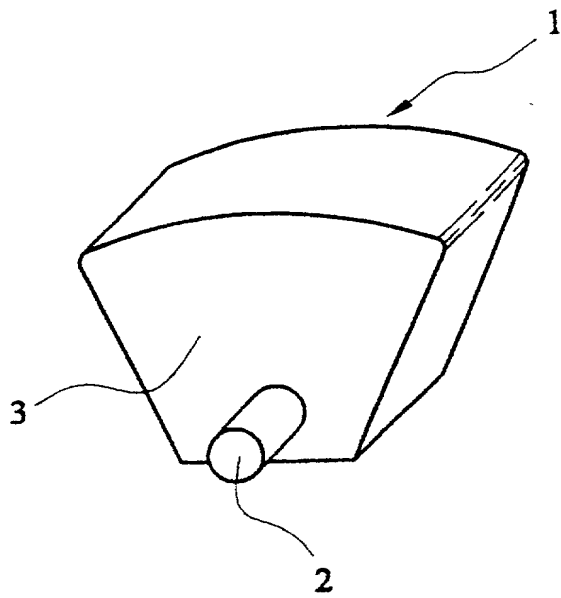
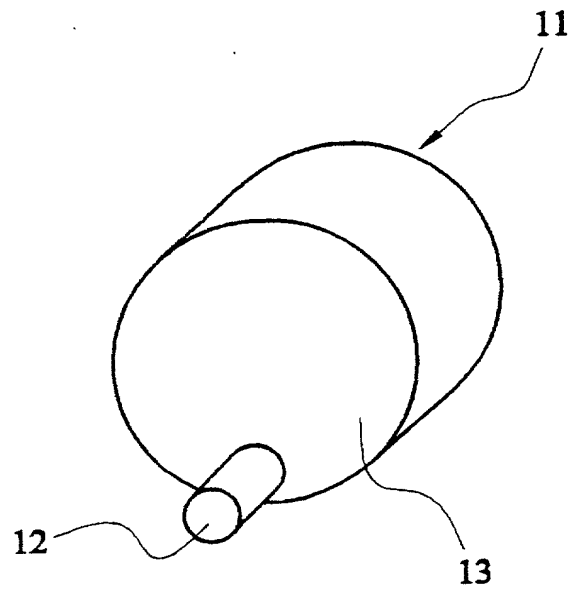
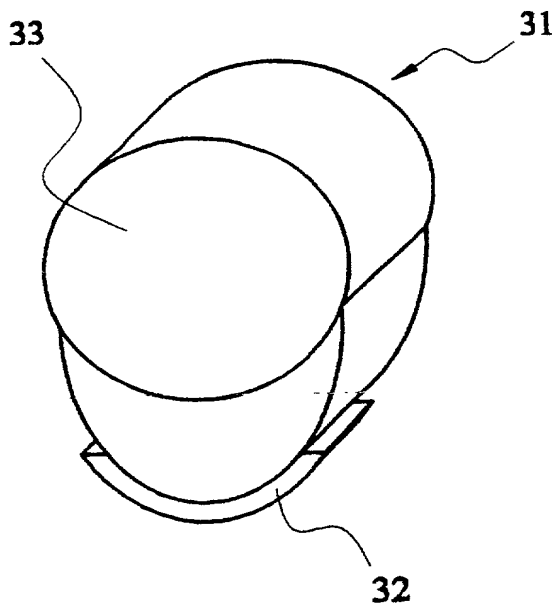
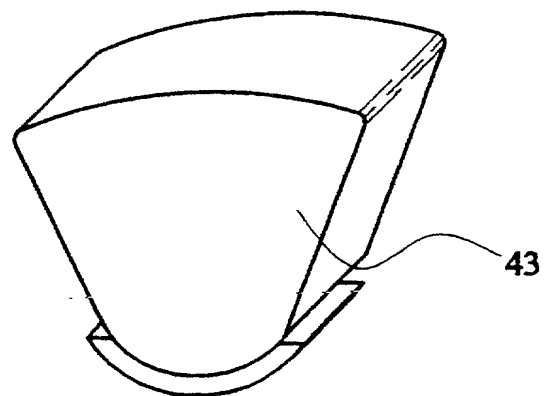
-16-

24. A fluid transfer system according to claim 22 wherein said means for enabling the passage of fluid between the interior and the exterior of the pipe comprises at least one slot arranged in the upper part of said pipe in use.
25. A fluid transfer system according to claim 22 wherein said pipe is porous.
26. A fluid transfer system according to any one of claims 20 to 25 wherein said system is used for drainage.
27. A fluid transfer system according to any one of claims 20 to 25 wherein said system is used for irrigation.
28. A fluid transfer system substantially as hereinbefore described with reference to the accompanying drawings.
29. A method of making a fluid transfer material comprising the steps of:-
- mixing together at least one thermoset material and/or at least one fibrous material and at least one thermoplastic material to form a mixture;
- placing said mixture in a mould; and
- heating said mixture so as to cause the melding of said at least one thermoplastic material to the other materials.
30. A method according to claim 29, further comprising the step of preheating said mixture before it is placed in said mould.

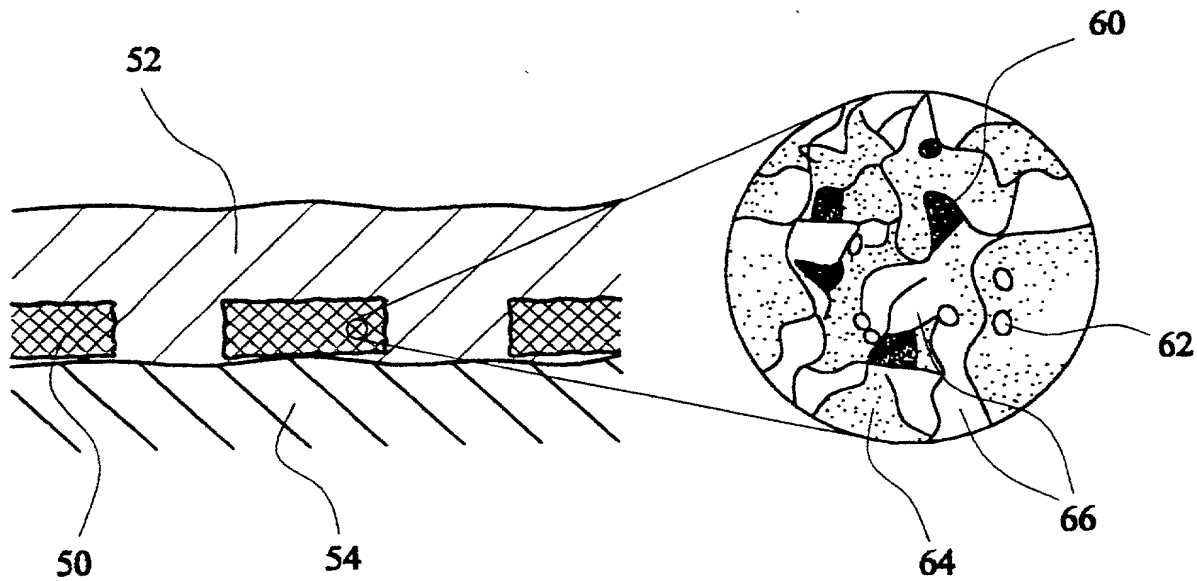
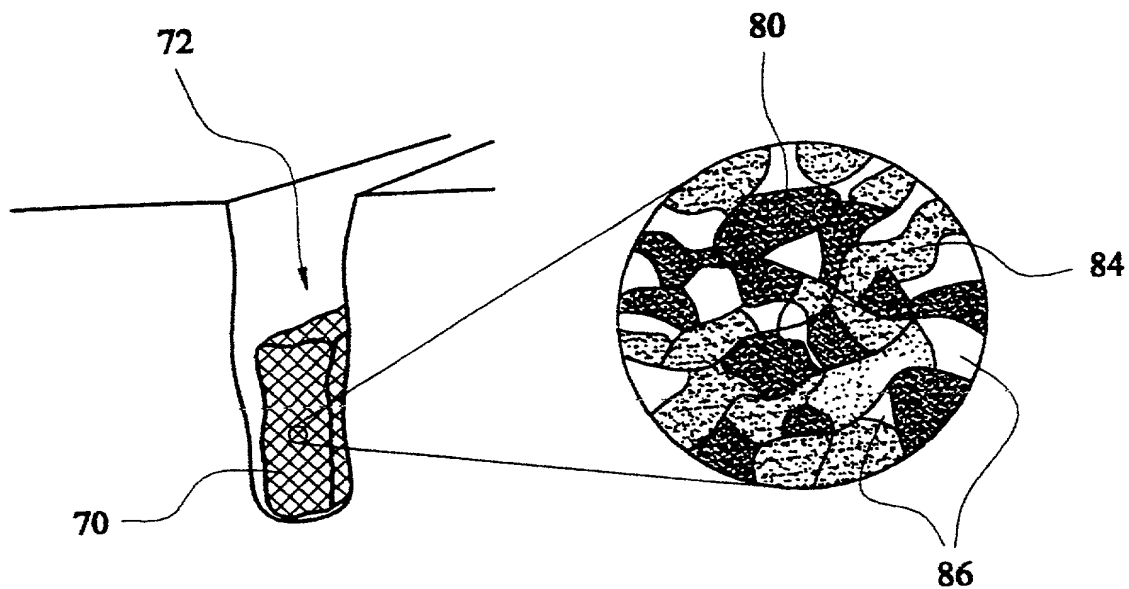
-17-

31. A method according to claim 29 or 30 wherein said mixture is heated by the introduction of a heated gas into the mixture.
32. A fluid transfer material for use in a system for transferring fluid, the fluid transfer material comprising at least one fibrous material mixed with and melded to at least one thermoplastic material.

-1/2-

FIG. 1FIG. 2FIG. 3FIG. 4

-2/2-

FIG. 5FIG. 6FIG. 7FIG. 8

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**POWER OF ATTORNEY OR
AUTHORIZATION OF AGENT**

Application Number

Filing Date

First Named Inventor

Title

Group Art Unit

Examiner Name

Attorney Docket Number

Gaskarth, John Alexander

Material for Use in a Fluid Transfer System

SWH/AVK/P71830US

I hereby appoint:

☐ Practitioners at Customer Number

OR

☒ Practitioner(s) named below:Place Customer
Number Bar Code
Label here

Name	Registration Number
Kenneth A. Keeling	31,842
James E. Hudson III	41,081

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Practitioners at Customer Number

OR

Place Customer
Number Bar Code
Label here☒ Firm or
Individual Name

Keeling Hudson L.L.C.

Address

901 North Post Oak Road

Address

City

Houston

State

Texas

Zip

77024

Country

USA

Telephone

713-680-1447

Fax

713-680-8567

I am the:

☒ Applicant/Inventor.☐ Assignee of record of the entire interest. See 37 CFR 3.71.

Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).

SIGNATURE of Applicant or Assignee of Record

Name

John Alexander Gaskarth

Signature

John A. Gaskarth

Date

22/11/01

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below.

☒ Total of forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box 

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**POWER OF ATTORNEY OR
AUTHORIZATION OF AGENT**

Application Number	
Filing Date	
First Named Inventor	Gaskarth, John Alexander
Title	Material for Use In A Fluid Transfer System
Group Art Unit	
Examiner Name	
Attorney Docket Number	SWH/AVK/P71630US

I hereby appoint:

☐ Practitioners at Customer Number 

OR

☒ Practitioner(s) named below:Place Customer
Number Bar Code
Label here


Name	Registration Number
Kenneth A. Keeling	31,842
James E. Hudson III	41,081

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Practitioners at Customer Number 

OR

Place Customer
Number Bar Code
Label here☒ Firm or
Individual Name

Keeling Hudson LLC.

Address

901 North Post Oak Road

Address

City

Houston

State

Texas

Zip

77024

Country

USA

Telephone

713-680-1447

Fax

713-680-8567

I am the:

☐ Applicant/Inventor.☒ Assignee of record of the entire interest. See 37 CFR 3.71.
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).**SIGNATURE of Applicant or Assignee of Record**

Name

Econoplas Limited

Signature

John A. Gaskarth (DIRECTOR)

Date

22/11/2001

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below.

☒ Total of _____ forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

PTO/SB/01 (10-01)

Approved for use through 10/31/2002, OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

Direct all correspondence to: <input checked="" type="checkbox"/>		Customer Number or Bar Code Label		OR <input checked="" type="checkbox"/>		Correspondence address below	
KENNETH A. KEELING KEELING HUDSON L.L.C.							
Name							
901 NORTH POST OAK ROAD							
Address							
HOUSTON				TEXAS		ZIP 77024-3845	
City				State		ZIP	
U.S.A.		Telephone 713-680-1447			Fax 713-680-8567		
Country		Telephone			Fax		
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.							
NAME OF SOLE OR FIRST INVENTOR :				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name JOHN ALEXANDER (first and middle (if any))				Family Name GASKARTH or Surname			
Inventor's Signature <i>John A. Gaskarth</i>				Date 22/11/2001			
Residence: City NORTH YORKSHIRE				State		Country U.K.	
City				State		Country	
Mailing Address LOW RIGG, STAINACRE, WHITBY							
NORTH YORKSHIRE				YO22 4LP		U.K.	
City				State		Country	
NAME OF SECOND INVENTOR:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle (if any))				Family Name or Surname			
Inventor's Signature				Date			
Residence: City				State		Country	
City				State		Country	
Mailing Address							
City				State		Country	
<input type="checkbox"/> Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.							

PTO/SB/01 (10-01)
 Approved for use through 10/31/2002. OMB 0651-0032
 U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
 Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	SWH/AVK/P71830US
	First Named Inventor	GASKARTH, JOHN ALEXANDER
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Art Unit	
	Examiner Name	

As the below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

MATERIAL FOR USE IN A FLUID TRANSFER SYSTEM

(Title of the Invention)

the specification of which

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) [] as United States Application Number or PCT International

Application Number [] and was amended on (MM/DD/YYYY) [] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
GB 9912852.6	GREAT BRITAIN	06/01/99	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
GB 9925498.9	GREAT BRITAIN	10/29/99	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.